


"ALTOP" DIAL THERMOMETER, CAPILLARY TYPE ATG 1001-E



Mercury-In-Steel,
Bottom Entry Panel Mounted Type

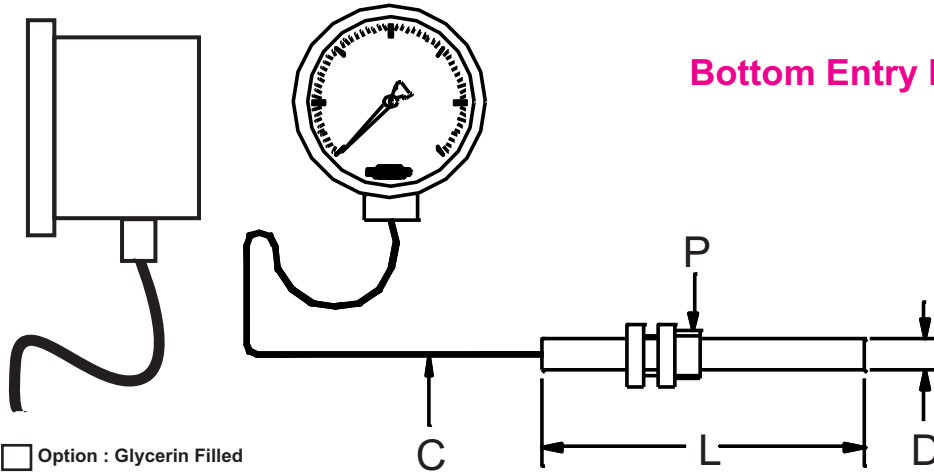

Option : Glycerin Filled

Dial Size	Case & Bezel	Capillary "C"	Stem	Connection "P"	Temp. Range	Elec. Contact	Accuracy																
01 63 mm 02 100 mm 03 150 mm 04 250 mm	A Cast Aluminum D SS 304 G SS 316																						
<table border="1"> <thead> <tr> <th>MATERIAL</th> <th>LENGTH</th> </tr> </thead> <tbody> <tr> <td>a) 3/16" SS 304</td> <td>_____ Mtr.</td> </tr> <tr> <td>b) SS 304 Armour</td> <td></td> </tr> <tr> <td>c) SS 304+ PVC</td> <td></td> </tr> </tbody> </table>		MATERIAL	LENGTH	a) 3/16" SS 304	_____ Mtr.	b) SS 304 Armour		c) SS 304+ PVC															
MATERIAL	LENGTH																						
a) 3/16" SS 304	_____ Mtr.																						
b) SS 304 Armour																							
c) SS 304+ PVC																							
<table border="1"> <thead> <tr> <th>MATERIAL</th> <th>DIA "D"</th> <th>LENGTH "L"</th> </tr> </thead> <tbody> <tr> <td>01 SS 304</td> <td>01 8mm</td> <td>_____ mm</td> </tr> <tr> <td>04 SS 316</td> <td>02 10mm 03 12mm 04 1/4" 05 3/8" 06 1/2" 07 Other</td> <td></td> </tr> </tbody> </table>		MATERIAL	DIA "D"	LENGTH "L"	01 SS 304	01 8mm	_____ mm	04 SS 316	02 10mm 03 12mm 04 1/4" 05 3/8" 06 1/2" 07 Other														
MATERIAL	DIA "D"	LENGTH "L"																					
01 SS 304	01 8mm	_____ mm																					
04 SS 316	02 10mm 03 12mm 04 1/4" 05 3/8" 06 1/2" 07 Other																						
02 1/2" BSP 02A 1/2" NPT X Other																							
					A -38 to +40 °C B -20 to 80 °C C 0 to 50 °C D 0 to 100 °C E 0 to 120 °C F 0 to 150 °C G 0 to 200 °C H 0 to 250 °C I 0 to 300 °C J 0 to 350 °C K 0 to 400 °C L 0 to 500 °C M 0 to 600 °C																		
					O NONE 01 1 N/O 02 2 N/O 03 1 N/C 04 2 N/C 05 1 N/O + 1 N/C <small>* Available for 4" & 6" Dial Size Only</small>	01 Slide Type 200 mA at 230V AC 02 Magnetic Type 1 Amp at 230V AC	02 1% (A to K) 03 1.5% (L to M)																
<table border="1"> <tr> <td>ATG</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1001-E</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>								ATG								1001-E							
ATG																							
1001-E																							

An ISO 9001 : 2008 company

Corporate & Mktg. Office : 165, G.I.D.C. Makarpura, Vadodara 390 010. Tel. : +91 - 265 - 2643550, 2646021.
 ■ Fax : + 91 - 265 - 2641054 ■ E-mail : marketing@altopindustries.com

Factory : 392 , 419-A, GIDC, Makarpura, Vadodara - 390 010.
 ■ Tel. : 0265-2658480 ■ E-mail : support@altopindustries.com

MUMBAI : 5, Turakhia Park Shopping Complex, Building No. 1, Next to Corporation Bank, M. G. Road, Kandivali (W), MUMBAI - 400 067. ■ Tel. : (022) 2806 6032 / 2806 6036 ■ Fax : (022) 2862 9113
 ■ Email : bombay@altopindustries.com

ALTOP Industries Ltd.
 PROCESS CONTROL INSTRUMENTATION
 CIN - U91110GJ1993PLC018831
<http://www.altopindustries.com>