


# "ALTOP" DIAL THERMOMETER, CAPILLARY TYPE ATG 1001-F



Mercury-In-Steel, Surface Mounting

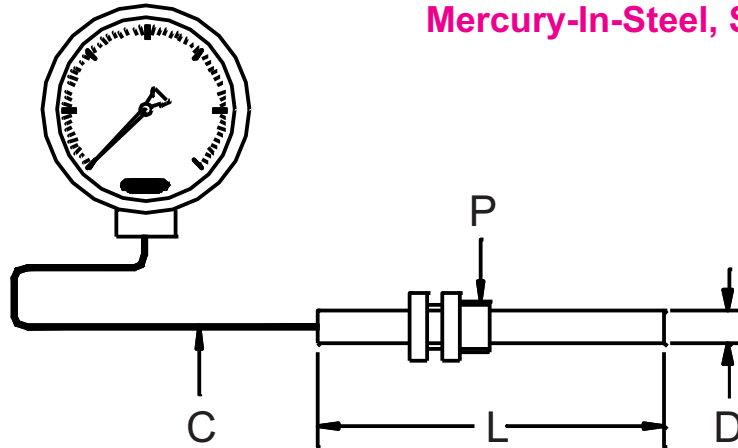

Option : Glycerin Filled

Dial Size	Case & Bezel	Capillary "C"	Stem	Connection "P"	Temp. Range	Elec. Contact	Accuracy																
01 63 mm 02 100 mm 03 150 mm 04 250 mm	A Cast Aluminum D SS 304 G SS 316																						
<table border="1"> <thead> <tr> <th>MATERIAL</th> <th>LENGTH</th> </tr> </thead> <tbody> <tr> <td>a) 3/16" SS 304</td> <td rowspan="3">_____ Mtr.</td> </tr> <tr> <td>b) SS 304 Armour</td> </tr> <tr> <td>c) SS 304+ PVC</td> </tr> </tbody> </table>		MATERIAL	LENGTH	a) 3/16" SS 304	_____ Mtr.	b) SS 304 Armour	c) SS 304+ PVC																
MATERIAL	LENGTH																						
a) 3/16" SS 304	_____ Mtr.																						
b) SS 304 Armour																							
c) SS 304+ PVC																							
<table border="1"> <thead> <tr> <th>MATERIAL</th> <th>DIA "D"</th> <th>LENGTH "L"</th> </tr> </thead> <tbody> <tr> <td>01 SS 304</td> <td>01 8mm</td> <td rowspan="7">_____ mm</td> </tr> <tr> <td>04 SS 316</td> <td>02 10mm</td> </tr> <tr> <td></td> <td>03 12mm</td> </tr> <tr> <td></td> <td>04 1/4"</td> </tr> <tr> <td></td> <td>05 3/8"</td> </tr> <tr> <td></td> <td>06 1/2"</td> </tr> <tr> <td></td> <td>07 Other</td> </tr> </tbody> </table>		MATERIAL	DIA "D"	LENGTH "L"	01 SS 304	01 8mm	_____ mm	04 SS 316	02 10mm		03 12mm		04 1/4"		05 3/8"		06 1/2"		07 Other				
MATERIAL	DIA "D"	LENGTH "L"																					
01 SS 304	01 8mm	_____ mm																					
04 SS 316	02 10mm																						
	03 12mm																						
	04 1/4"																						
	05 3/8"																						
	06 1/2"																						
	07 Other																						
	02 1/2" BSP 02A 1/2" NPT X Other																						
					<p>A -38 to +40 °C B -20 to 80 °C C 0 to 50 °C D 0 to 100 °C E 0 to 120 °C F 0 to 150 °C G 0 to 200 °C H 0 to 250 °C I 0 to 300 °C J 0 to 350 °C K 0 to 400 °C L 0 to 500 °C M 0 to 600 °C</p>	02 1% (A to K) 03 1.5% (L to M)																	
					<p>O NONE 01 1 N/O 02 2 N/O 03 1 N/C 04 2 N/C 05 1 N/O + 1 N/C * Available for 4" &amp; 6" Dial Size Only</p>	01 Slide Type 200 mA at 230V AC 02 Magnetic Type 1 Amp at 230V AC																	
ATG 1001-F																							

